

TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC


TA8720AN

AV SWITCH FOR COLOR TV WITH S-TERMINAL

The TA8720AN is an IC used for switching of 4-inputs 3 circuits of sound (L, R) and video signals.

FEATURES


- Audio section (2 channels for a STEREO signal)
 - Inputs : Three inputs for external signals
An input for an internal TV signal
 - Outputs : A switched and selected output
Sound Mute
- Video section
 - Inputs : Two inputs for external signal (Sync negative)
: YC inputs for S-VHS
: An input for and internal TV signal
(Sync negative or positive)
 - Outputs : Monitor output
(YC MIX circuit for S-VHS is built-in)
: Y signal output
: Chroma signal output

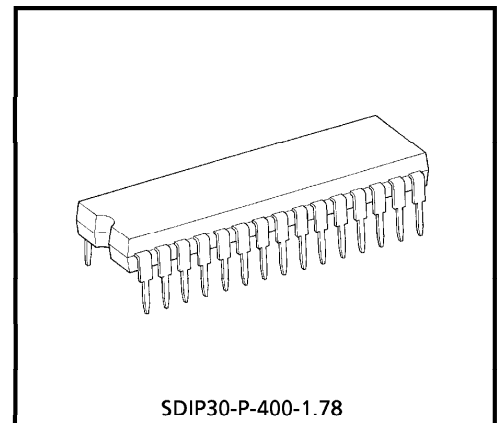


SDIP30-P-400-1.78

Weight : 1.99g (Typ.)



BLOCK DIAGRAM

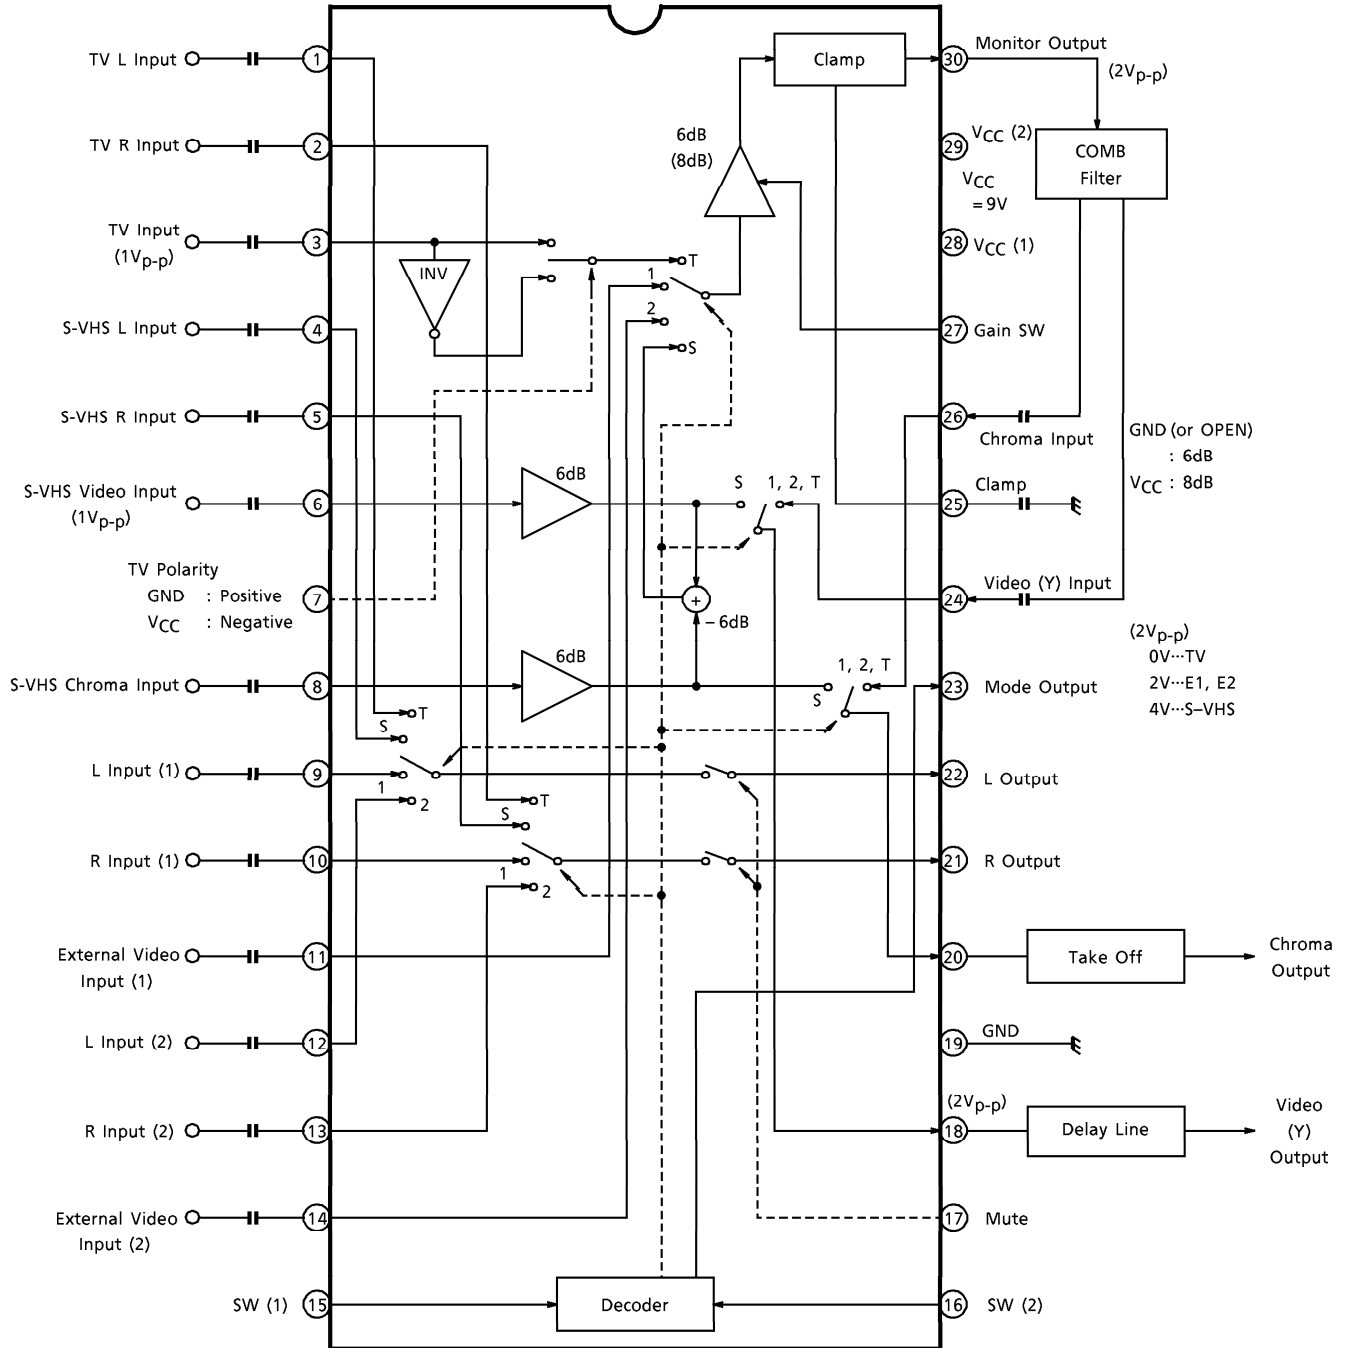





TERMINAL INTERFACE CIRCUIT

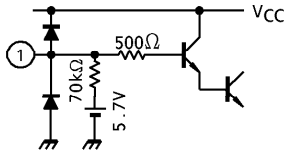




Pin 2, 4, 5, 9, 10, 12, 13 are same.

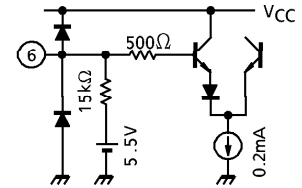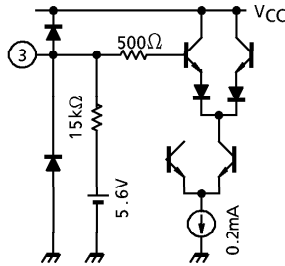



Pin 8 is same.

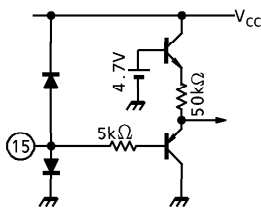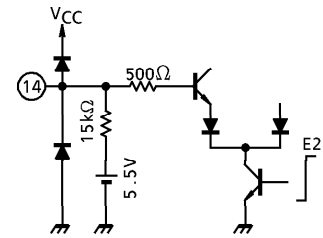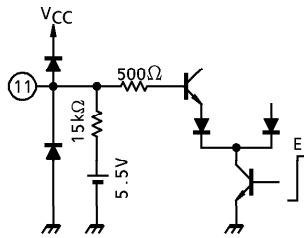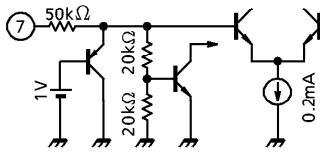




Pin 16 is same.

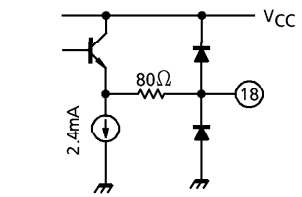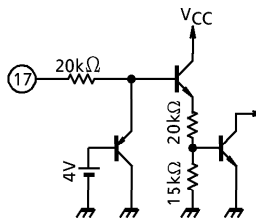

Pin 22 is same.

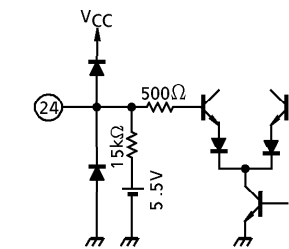

Pin 26 is same.

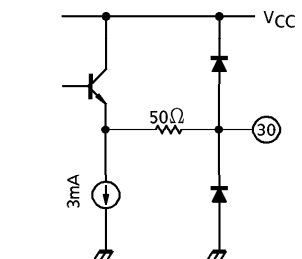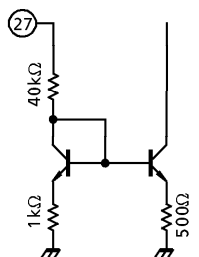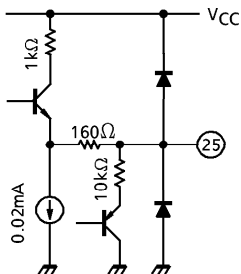

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Power Supply Voltage	V _{CC max}	15	V
Input Terminal Signal Voltage	e _{in max}	3	V _{p-p}
Input Terminal Voltage	V _{in max}	GND - 0.3V ~ V _{CC} + 0.3V	—
Power Dissipation	P _{D max}	1.6 (Note)	W
Operating Temperature	T _{opr}	-20~65	°C
Storage Temperature	T _{stg}	-55~150	°C

LOGIC TABLE

		SW2 [PIN 16]	
		HIGH LEVEL	LOW LEVEL
SW1 [PIN 15]	HIGH LEVEL	TV	E1
	LOW LEVEL	S-VHS	E2

(Note) When using the device at above Ta = 25°C, decrease the power dissipation by 12.8mW for each increase of 1°C.

RECOMMENDED POWER SUPPLY VOLTAGE

PIN No.	PIN NAME	MIN.	TYP.	MAX.	UNIT
28	9V Power Supply (V _{CC})	8.1	9.0	9.9	V
29					

ELECTRICAL CHARACTERISTICSDC CHARACTERISTICS (Unless otherwise specified, $V_{CC} = 9V$, $T_a = 25^\circ C$)

DC voltage characteristic

PIN No.	PIN NAME	SYMBOL	MIN.	TYP.	MAX.	UNIT	NOTE
1	TV L Input	V1	5.2	5.7	6.2	V	—
2	TV R Input	V2	5.2	5.7	6.2		
3	TV Input	V3	5.1	5.6	6.1		
4	S-VHS L Input	V4	5.2	5.7	6.2		
5	S-VHS R Input	V5	5.2	5.7	6.2		
6	S-VHS Video Input	V6	5.0	5.5	6.0		
7	TV Polarity Switch	V7	—	—	—		
8	S-VHS Chroma Input	V8	5.0	5.5	6.0		
9	L Input (1)	V9	5.2	5.7	6.2		
10	R Input (1)	V10	5.2	5.7	6.2		
11	External Video Input (1)	V11	5.0	5.5	6.0		
12	L Input (2)	V12	5.2	5.7	6.2		
13	R Input (2)	V13	5.2	5.7	6.2		
14	External Video Input (2)	V14	5.0	5.5	6.0		
15	Switch (1)	V15	—	—	—		
16	Switch (2)	V16	—	—	—		
17	Mute	V17	—	—	—		
18	Video (Y) Output	V18	3.5	4.0	4.5		
19	GND	V19	—	—	—		
20	Chroma Output	V20	3.5	4.0	4.5		
21	R Output	V21	3.8	4.3	4.8		
22	L Output	V22	3.8	4.3	4.8		
23	Mode Output	V23	1.5	2.0	2.5		
24	Video (Y) Input	V24	5.0	5.5	6.0		
25	Clamp	V25	2.6	3.1	3.6		
26	Chroma Input	V26	5.0	5.5	6.0		
27	Gain Switch	V27	—	—	—		
28	V_{CC} (1)	V28	—	V_{CC}	—		
29	V_{CC} (2)	V29	—	V_{CC}	—		
30	Monitor Output	V30	2.4	2.9	3.4		

Supply current

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	NOTE
Supply Current (Pin 28 : V_{CC1})	I_{CC1}	4.0	6.0	9.0	mA	—
Supply Current (Pin 29 : V_{CC2})	I_{CC2}	14	21	31		
Total Supply Current ($I_{CC1} + I_{CC2}$)	I_{CC}	18	27	40		

Input resistance

PIN No.	PIN NAME	SYMBOL	MIN.	TYP.	MAX.	UNIT	NOTE		
3	TV Input	R3	10	15	21	k Ω	Supply an external voltage which is 0.5V higher than open voltage. Measure the flow-in current. Calculate the resistor value.		
6	S-VHS Video Input	R6							
8	S-VHS Chroma Input	R8							
11	External Video Input (1)	R11							
14	External Video Input (2)	R14							
24	Video (Y) Input	R24							
26	Chroma Input	R26							
1	TV L Input	R1	48	70	98				
2	TV R Input	R2							
4	S-VHS L Input	R4							
5	S-VHS R Input	R5							
9	L Input (1)	R9							
10	R Input (1)	R10							
12	L Input	R12							
13	R Input	R13							

Output resistance

PIN No.	PIN NAME	SYMBOL	MIN.	TYP.	MAX.	UNIT	NOTE
18	Video (Y) Output	R18	—	100	—	Ω	Measure the terminal voltage variation when the flow-in current is 100 μ A. Calculate the resistor value.
20	Chroma Output	R20	—	100	—		
21	R Output	R21	—	130	—		
22	L Output	R22	—	130	—	k Ω	
23	Mode Output	R23	—	11	—	Ω	
30	Monitor Output	R30	—	70	—		

AC CHARACTERISTIC (Unless otherwise specified, $V_{CC} = 9V$, $T_a = 25^\circ C$)

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION							MIN.	TYP.	MAX.	UNIT		
			SWg	SW7	SW15	SW16	SW17	V3	OTHER						
Input Dynamic Range	V_{dY}	—	a	a	b	a	b	a	5V	1.7	2.2	—	V_{p-p}		
														SW 3 : b	Other : a
														SW 6 : b	Other : a
														SW 8 : b	Other : a
														SW 11 : b	Other : a
														SW 14 : b	Other : a
	V_{dY}^{YC}	—	a	b	b	a	b	a	5V	5.5	6.5	—	V_{p-p}		
														SW 24 : a	Other : b
														SW 26 : a	Other : b
														SW 6 : a	Other : b
														SW 8 : a	Other : b
														SW 8 : a	Other : b
V_{dY}^S	—	a	a	a	b	a	b	5V	1.9	2.4	—	V_{p-p}			
													SW 6 : a	Other : b	

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION								MIN.	TYP.	MAX.	UNIT							
			SWg	SW7	SW15	SW16	SW17	V3	OTHER	OTHER											
Video Gain	G _v	—	a	a	b	b	a	a	a	5V	SW 3 : b Other : a	SW 6 : b Other : a	SW 8 : b Other : a	SW 11 : b Other : a	SW 14 : b Other : a	SW 3 : b Other : a	(1) V2 : 15kHz, 1V _{p-p} sine wave (2) Measure the pin 30 signal amplitude for each mode.	5.0	6.0	7.0	dB
					a	b												b	a	a	
	ΔG _v	—	a	a	a	b	b	a	a	a	5V	SW 3 : b Other : a	SW 27 : b Other : a	(1) Ditto (2) Measure the pin 30 signal amplitude for each mode. (3) Calculate the difference between G _v .	1.5	2.0	2.5	dB			
															a	a	b		a	a	b
G _{Yc}	—	—	a	a	b	b	a	a	a	5V	SW 24 : a Other : b	SW 26 : a Other : b	(1) Ditto (2) Measure the pin 30 signal amplitude for each mode.	5.0	6.0	7.0	dB				
														a	a	b		a	a	b	5.0
S G _{Yc}	—	—	a	a	b	b	a	a	a	5V	SW 6 : a Other : b	SW 8 : a Other : b	(1) Ditto (2) Measure the pin 30 signal amplitude for each mode.	5.0	6.0	7.0	dB				
														a	a	b		a	a	b	5.0

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION							MIN.	TYP.	MAX.	UNIT
			SW9	SW7	SW15	SW16	SW17	V3	OTHER				
Video Cross Talk	CM	—	a	a	b	b	a	a	50	64	—	dB	
					b	a							b

(1) V2 : 4.43MHz, 1V_{p-p} sine wave
 (2) TV mode
 SW 3 : B
 Measure the output level of pin 30 as 0dB reference.
 Measure the output level of pin 30 when the input pin change to 6, 8, 11, 14 for each mode.

SW 3, 6, 8, 11, 14 : a→b→a
 Other : a

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION						MIN.	TYP.	MAX.	UNIT
			SWg	SW7	SW15SW16SW17	V3	OTHER					
Cross Talk Between YC	CYC	---	a	a			SW24 b→a SW26 a→b Other : a	50	60	—	dB	
			b	b								(1) V2 : 4.43MHz, 1V _{p-p} sine wave (2) SW24 : b Measure the output level of pin 18 as 0dB reference. Measure the output level of pin 18 when V2 is applied to pin 26. (3) SW26 : b Measure the output level of pin 20 as 0dB reference. Measure the output level of pin 20 when V2 is applied to pin 24.
			a									Repeat (1), (2), (3)

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION							MIN.	TYP.	MAX.	UNIT
			SWg	SW7	SW15	SW16	SW17	V3	OTHER				
Frequency Band Width	FM	—	a	a	b	a	a	a	10	24	—	MHz	
					a								b
Frequency Band Width	FyC	—	a	b	b	b	b	b	10	56	—	MHz	
													a

(1) V2 : 1V_{p-p} sine wave
 (2) V2 : 100kHz
 Measure the amplitude of pin 30.
 (3) Set the frequency of V2 at -3dB point.
 Read the frequency of V2.

(1)~(3) Same as above.
 (4) Read the frequency of V2 when the outputs are pin 18 and 20.

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION					MIN.	TYP.	MAX.	UNIT			
			SW9	SW7	SW15	SW16	SW17					V3	OTHER	
Clamp Level	CL	—			b	b						21	—	%
Sound Dynamic Range	V_{dY}^A	—	a	a		a	5V				5	6	—	V_{p-p}
Sound Gain	GA	—		adj.	adj.						—0.5	0	0.5	dB
Sound Frequency Characteristic	fA	—									100	—	—	kHz

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	SWg	SW7	SW15	SW16	SW17	V3	OTHER	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Cross Talk Between Source	CA	—	a	a	a	a	a	5V	SW 4, 5, 9, 10, 12, 13 : b Other : a	(1) V2 : 1kHz, 1V _{p-p} sine wave (2) Measure the L and R output amplitude (v). (3) Calculate 20log v.	60	72	—	dB
									SW 1, 2, 9, 10, 12, 13 : b Other : a					
									SW 1, 2, 4, 5, 12, 13 : b Other : a					
Cross Talk Between L and R Sound Path	CLR	—	a	a	adj.	adj.	—	—	(1) Ditto (2) Measure the R output amplitude when the input channel is L side for each mode, and vice versa.	60	75	—		
									SW 1, 2 : b Other: a					(1) Ditto (2) SW17 : a Measure the L and R output amplitude (v1). (3) SW17 : b Measure the L and R output amplitude (v2). (4) Calculate 20log (v2/v1)
Sound Mute Attenuation Level	MA	—									60	75	—	


CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION							MIN.	TYP.	MAX.	UNIT
			SWg	SW7	SW15	SW16	SW17	V3	OTHER				
SW (1) Threshold Voltage	$V_{th I}$	—			adj.	a			(1) V2 : 100kHz, 1V _{p-p} sine wave (2) By increasing the level of V3, read the voltage when the output signal appears on pin 30.	1.0	2.0	3.0	V
SW (2) Threshold Voltage	$V_{th II}$	—		a	adj.		adj.	(1) Ditto (2) By increasing the level of V3, read the voltage when the output signal disappears on pin 30.	1.0	2.0	3.0		
Sound Mute SW Threshold Voltage	$V_{th M}$	—			a	a	adj.	(1) Ditto (2) By increasing the level of V3, read the voltage when the output signal disappears on pin 22.	1.3	2.3	3.3		
TV Polarity Threshold Voltage	$V_{th P}$	—						—	—	4.0	—		

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION						MIN.	TYP.	MAX.	UNIT
			SWg	SW7	SW15	SW16	SW17	V3				
TV Mode	—	—			b							
S Mode	—	—	a	a	a	b	a	5V				
E1 Mode	—	—			b							
E2 Mode	—	—			a							


(1) V2 : 100kHz, 1V_{p-p} sine wave
 (2) Confirm the output signal appears on pin 18, 20, 21, 22, 23.

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION						MIN.	TYP.	MAX.	UNIT
			SWg	SW7	SW15	SW16	SW17	V3				
TV Polarity Inversion Mode	—	—	a or b	b	b	—	SW 3 : b Other : a	(1) SW7 : a Check the signals of V2 and pin 30 are in phase. (2) SW7 : b Check the signals of V2 and pin 30 are opposite phase.	—	—	—	—
			a	adj.	adj.	b	5V	SW 1, 2, 4, 5, 9, 10, 12, 13 : b Other : a	Check the disappearance on pin 21, 22 for each mode.	—	0	0.2
Sound Mute	—	—	a	b	a	b	—	Measure the pin 23 voltage for each mode.	1.7	2.0	2.3	V
			a	adj.	adj.	b	—	—	3.7	4.1	4.5	
			a	a	a	b	—	—	—	—	—	—

TEST CIRCUIT 1
DC CHARACTERISTIC

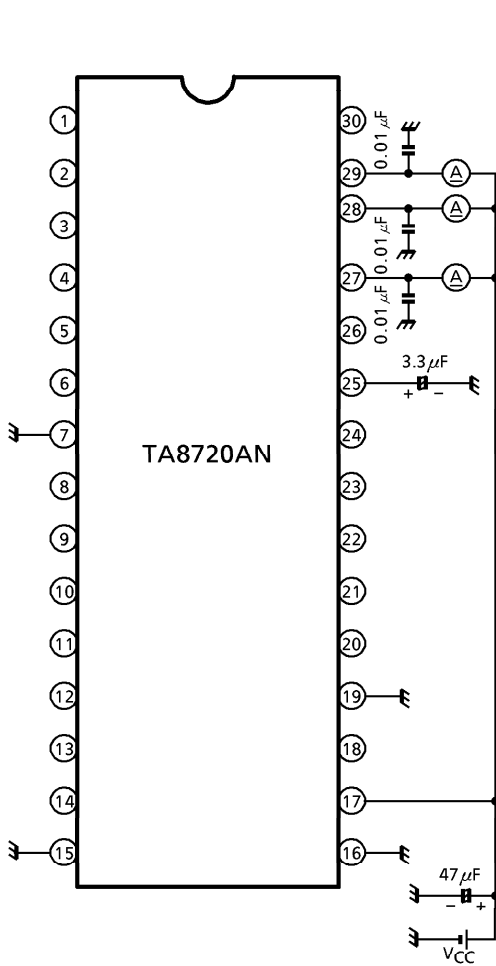


TEST CIRCUIT 2
AC CHARACTERISTIC

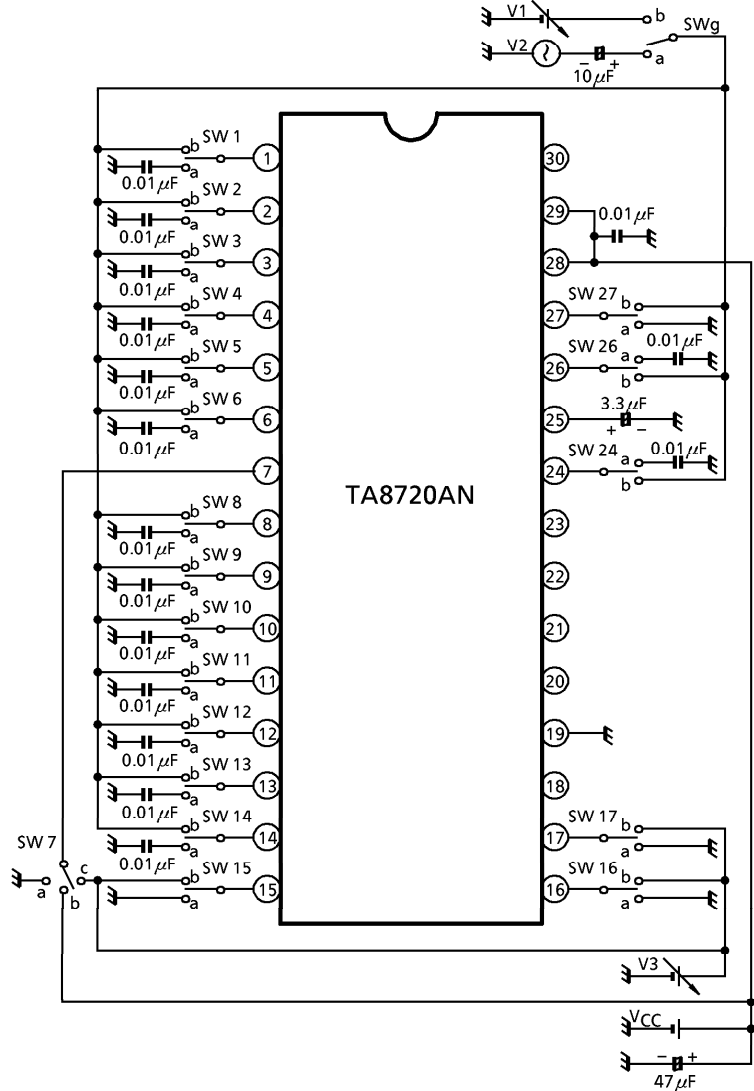

PACKAGE DIMENSIONS
SDIP30-P-400-1.78

Unit : mm

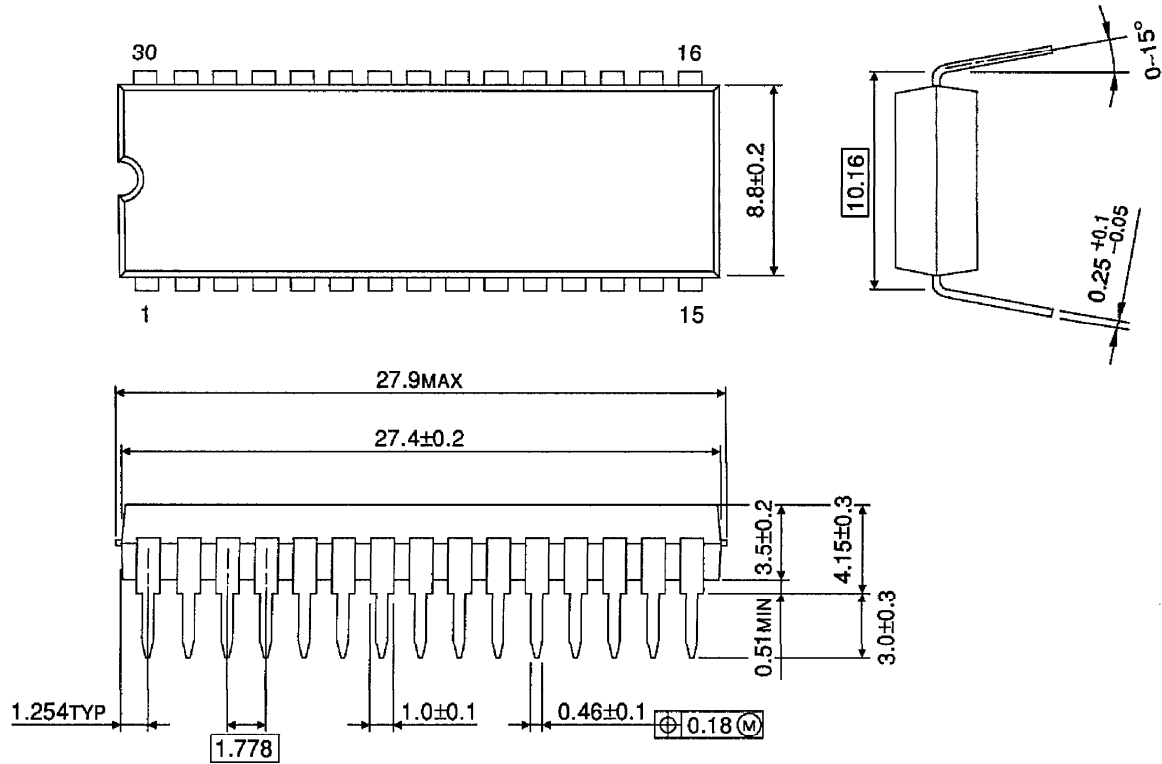

Weight : 1.99g (Typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.