

GENERAL PURPOSE APPLICATION
SWITCHING APPLICATION.

FEATURES


✓Excellent h_{FE} Linearity

$$: h_{FE}(0.1mA)/h_{FE}(2mA)=0.95(Typ.).$$

- Low Noise : NF=1dB(Typ.), 10dB(Max.).
- Complementary to KTC3199.

MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-50	V
Collector-Emitter Voltage	V_{CEO}	-50	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector C rrent	I_C	-150	mA
Emitter C rrent	I_E	150	mA
Collector Power Dissipation	P_C	400	mW
J nction Temperat re	T	150	°C
Storage Temperat re Range	T_{stg}	-55 ~ 150	°C

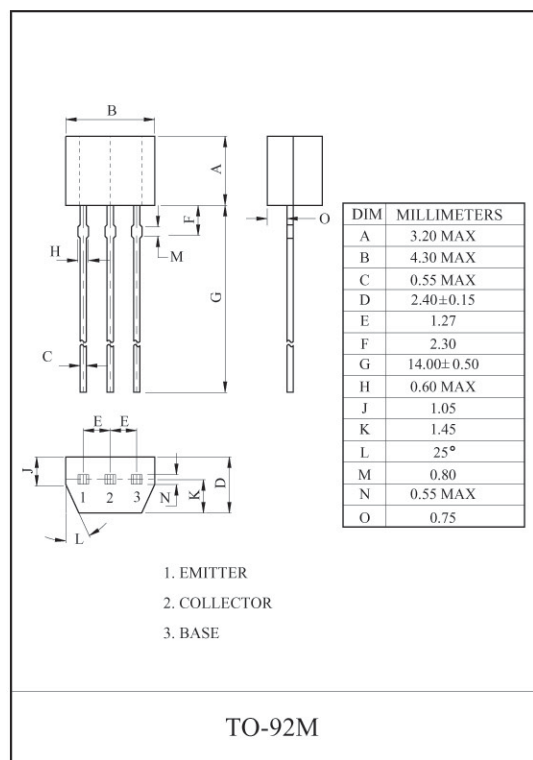


ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector C t-off C rrent	I_{CBO}	$V_{CB}=-50V, I_E=0$	-	-	-0.1	μA
Emitter C t-off C rren t	I_{EBO}	$V_{EB}=-5V, I_C=0$	-	-	-0.1	μA
DC C rrent Gain	h_{FE} (Note)	$V_{CE}=-6V, I_C=-2mA$	70	-	400	
Collector-Emitter Sat ration Voltage	$V_{CE(sat)}$	$I_C=-100mA, I_B=-10mA$	-	-0.1	-0.3	V
Transition Fre ency	f_T	$V_{CE}=-10V, I_C=-1mA$	80	-	-	MH
Collector O tp t Capacitance	C_o	$V_{CB}=-10V, I_E=0, f=1MH$	-	4.0	7.0	pF
Noise Fig re	NF	$V_{CE}=-6V, I_C=-0.1mA, f=1H, R_g=10 \Omega$	-	1.0	10	dB


Note : h_{FE} Classification O:70 ~ 140 , Y:120 ~ 240 , GR:200 ~ 400

KTA1267


$I_C - V_{CE}$

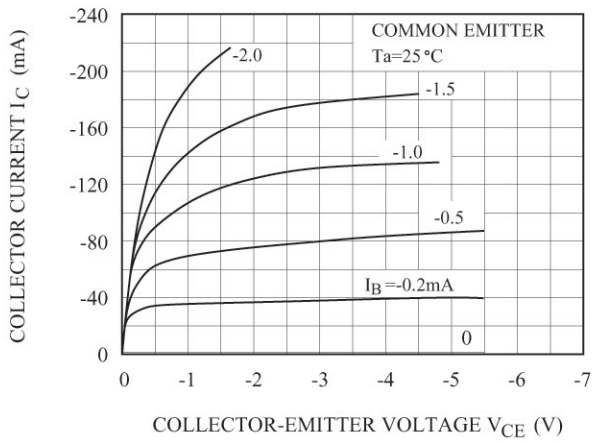


$h_{FE} - I_C$

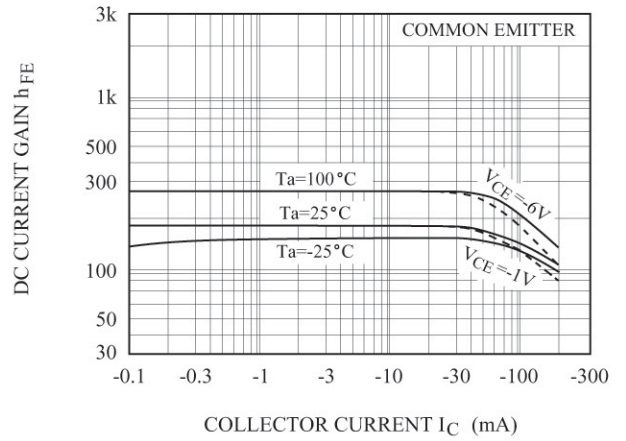


$V_{CE(sat)} - I_C$

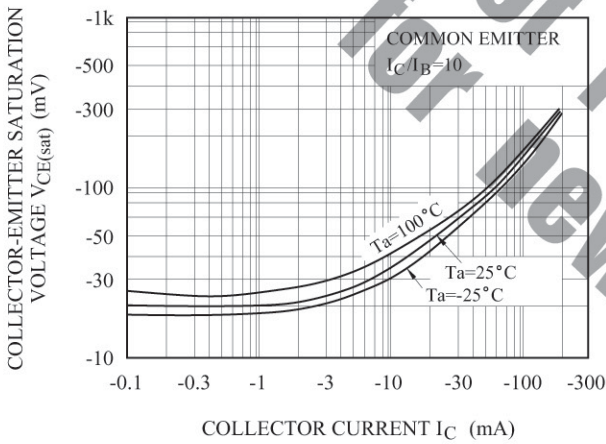

$f_T - I_C$

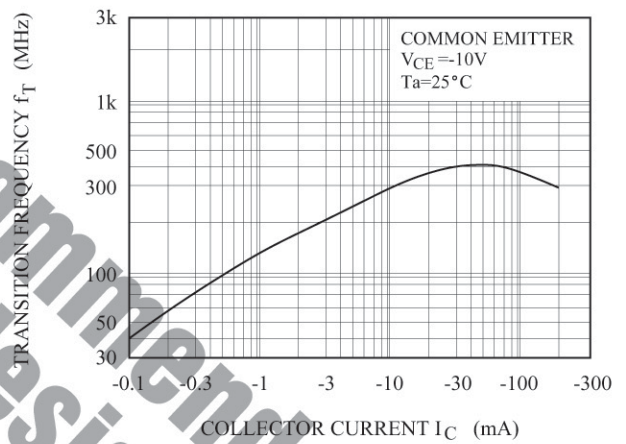

$I_B - V_{BE}$

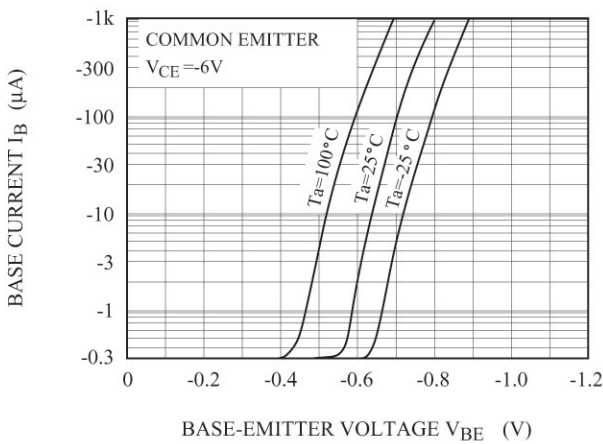

$P_C - T_a$

