



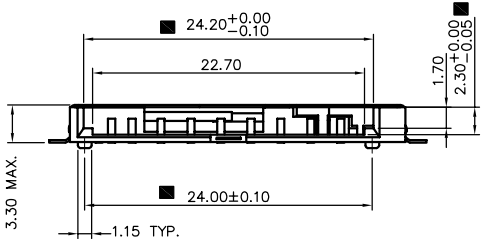


EJECT STROKE

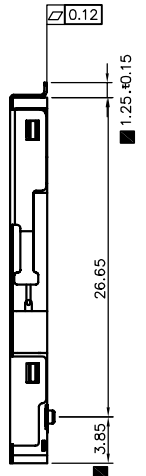

Material
Insulator: LCP+30% G.F., UL 94V-0 Rated Color : Black Contact: Phosphor Bronze , JIS C5191R-H , 0.25t
Plating
Contact Area: Gold plating over 1.2Jgm(50u")Nickel underplating. See Note Soldering Zone: 3.08Jgm(120u") min. Sn/Pb, 90/10, or 100%TIN over 1.2Jgm(50u") min. Ni underplate overall.
NOTES: This soldering pad is optional and shall be grounding. Inspection Dimension: ■ Critical

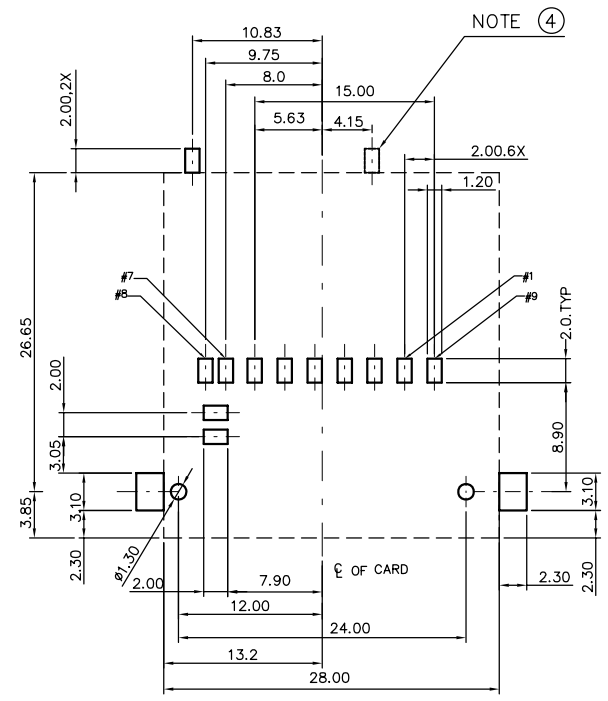

RECOMMENDED P.C.B. LAYOUT

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±
.0	±0.25
.00	±0.20

Attend
ATTEND TECHNOLOGY INC.
www.attend.com.tw

SCALE: AS SHOWN	UNIT: mm
DRAWN: Willis	2006/11/28
CHECKED: / /	
APPROVED: / /	

DRAWN NAME: SD Socket
Push-Push Type,W/Card Lock Function
PRODUCT NO. 104G-TAA0-R
FILE NAME: 104G-TAA0-R

REV.	DESCRIPTION	DATE	SIZE	REV.
1			A4	