

MINI USB 8P/F SMT TYPE



Specifications

Electrical:

Rating: AC 5V/0.5A

Contact Resistance: 100M Ohm Min at DC500V

Insulation Resistance: 100M Ohm Min at DC 500V

Dielectric Withstanding Voltage:

AC 100V for 1 minute(Cut-off: 0.5mA)

Mechanical:

Insertion Force: 35N(3.57Kg)Max.

Withdrawal Force: 1N(0.1Kg)Min.

Notes:

MATERIAL:

Contact: Phosphor Copper

Front Housing: LCP






Back Housing: LCP

Shell: BRASS





PLATING:

Shell: NICKEL

Contact: GOLD 10 μ */TIN



MINI USB 10P/M PLUG (双排)

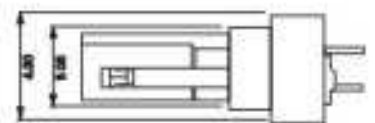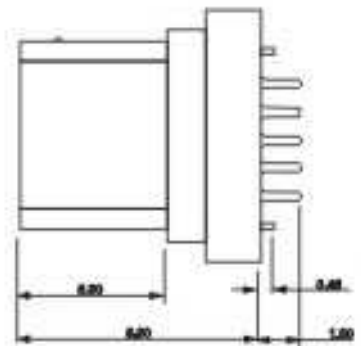

Note

MATERIAL:

Housing: LCP

PIN: Phosphor Bronze

Spin: phosphor Bronze

PLATING:

Pin: Gold 3 μ *

Sprin: TIN