

Push Switch

FEATURES

1. Miniature switch with lock or non-lock.
2. Compact and terminals are insert molded for surface mountable on P. C. B..
3. Good feeling and 2P2T type be applied.

APPLICATIONS


Operating in all types of electronic equipment such as audio, computer, office communications, measuring apparatus, etc..

SPECIFICATIONS


Specification	Model no.	5.8x5.8mm	7.0x7.0mm	8.5x8.5mm	8.0x8.0mm
Rating		0.1A, 30VDC	0.1A, 30VDC	0.3A, 30VDC 0.5A, 16VDC	0.1A, 30VDC
Insulation resistance		100MΩ Min. at 125VDC		100MΩ Min. at 250VDC	
Withstand voltage		125VAC for 1 minute	125VAC for 1 minute	250VAC for 1 minute	250VAC for 1 minute
Contact resistance		100mΩ Max.		50mΩ Max.	
Soldering temperature		245±5°C Max. for 3 seconds			
Mechanical life		100,000 cycles			
Electrical life		10,000 cycles			
Ambient temperature used		-25°C to +65°C			
Ambient humidity used		85% RH Max.			
Operating force		150±80gf	150±80gf	200±80gf	160±80gf

DIMENSIONS (Unit:mm)


5.8x5.8mm

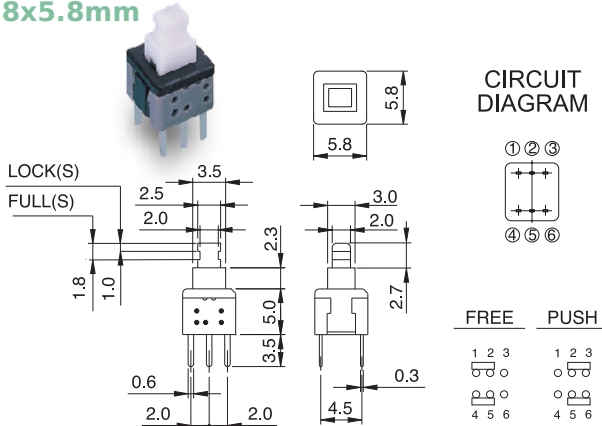

7.0x7.0mm

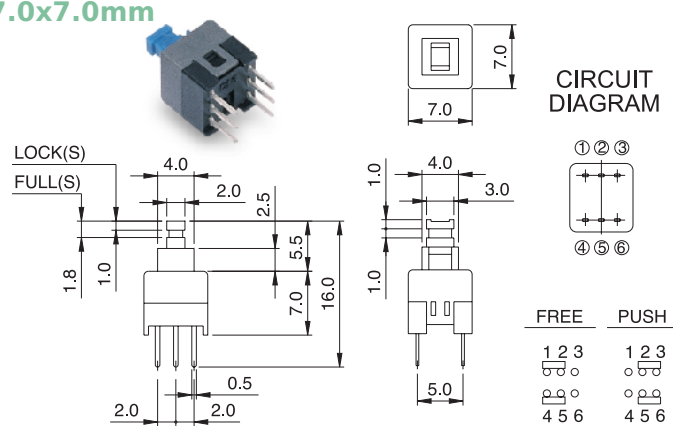

8.5x8.5mm

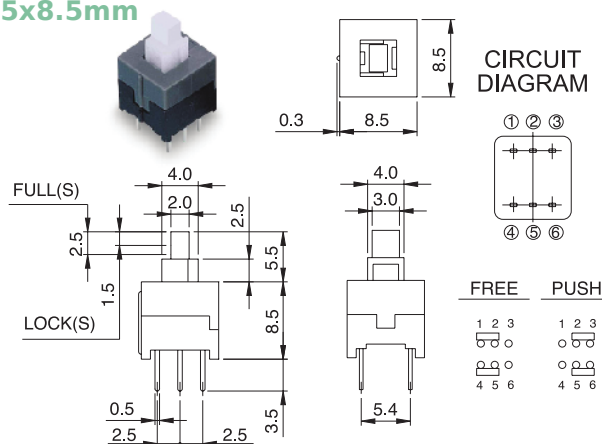

8.0x8.0mm

