





针套

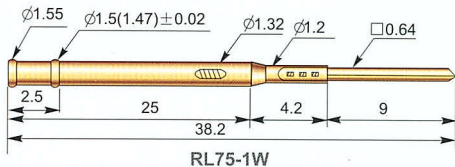


RL75-2W




RL75-3W




RL75-4W(5W:10.0)



RL75-2T



RL75-3T(4T:7.5)
(5T:10.0)
(6T:12.0)




RL75-1S



RL75-2S



RL75-3S



RL75-4S(5S:10.0)

材料

针管 磷铜管镀金

弹簧 不锈钢线

套管 黄铜管镀金

针杆

国产料 磷铜镀镍

进口料 铍铜(或SK4)镀镍(或金/铈)

(用NEW标识)

钻孔尺寸

1.40mm

额定电流

3安培

接触电阻

50毫欧姆

6.35mm行程弹力

(60g)(90g)

120g(200g)(250g)

(括号内为定制品)