

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07690 D 7-33-65

SILICON NPN TRIPLE DIFFUSED TYPE

2SC3309

SWITCHING REGULATOR AND HIGH VOLTAGE SWITCHING APPLICATIONS.

HIGH SPEED DC-DC CONVERTER APPLICATION.

FEATURES:


- Excellent Switching Times
 $t_r=1.0\mu s$ (Max.), $t_f=1.0\mu s$ (Max.) at $I_C=0.8A$
- High Collector Breakdown Voltage: $V_{CE0}=400V$

MAXIMUM RATINGS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT	
Collector-Base Voltage	V_{CBO}	500	V	
Collector-Emitter Voltage	V_{CEO}	400	V	
Emitter-Base Voltage	V_{EBO}	7	V	
Collector Current	I_C	2	A	
Base Current	I_B	0.5	A	
Collector Power Dissipation	P_C	$T_a=25^\circ C$	2.0	W
		$T_c=25^\circ C$	20	
Junction Temperature	T_j	150	$^\circ C$	
Storage Temperature Range	T_{stg}	-55 ~ 150	$^\circ C$	

INDUSTRIAL APPLICATIONS

Unit in mm

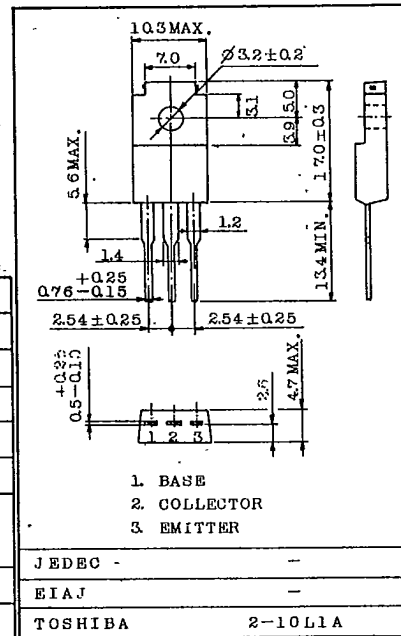

Weight : 2.1g

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=400V, I_E=0$	-	-	100	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=7V, I_C=0$	-	-	1	mA
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=1mA, I_E=0$	500	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=10mA, I_B=0$	400	-	-	V
DC Current Gain	h_{FE}	$V_{CE}=5V, I_C=0.1A$	20	-	-	
		$V_{CE}=5V, I_C=1A$	8	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=1A, I_B=0.2A$	-	-	1.0	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=1A, I_B=0.2A$	-	-	1.5	V
Switching Time	Rise Time	t_r	-	-	1.0	μs
	Storage Time	t_{stg}	-	-	2.5	
	Fall Time	t_f	-	-	1.0	

Switching Time Test Circuit:
 - Input: 20 μs pulse
 - Base current: I_{B1} (positive), I_{B2} (negative)
 - Collector current: I_C
 - Collector-Emitter Voltage: $V_{CE}=200V$
 - Duty Cycle: $< 1\%$


TOSHIBA CORPORATION

9097250 TOSHIBA (DISCRETE/OPTO)


56C 07691 DT-33-05

2SC3309


STATIC CHARACTERISTICS

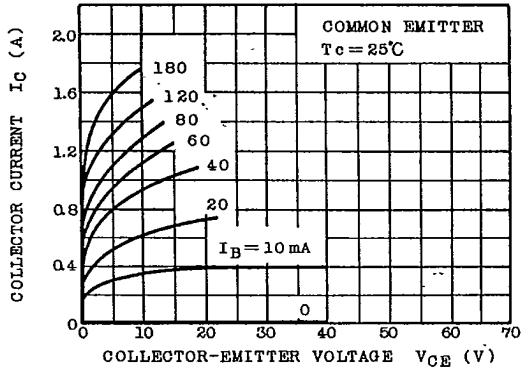


I_C - V_{CE} (LOW VOLTAGE REGION)

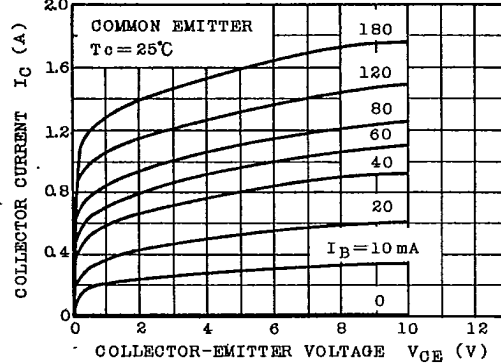


h_{FE} - I_C

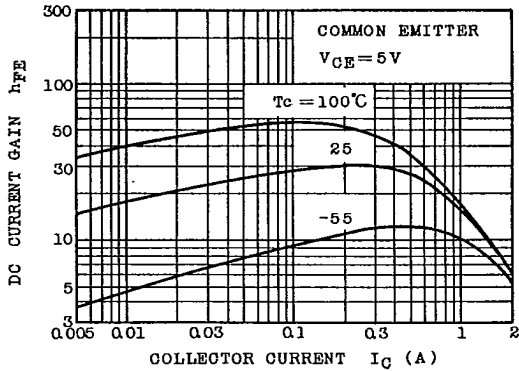


V_{CE(sat)} - I_C

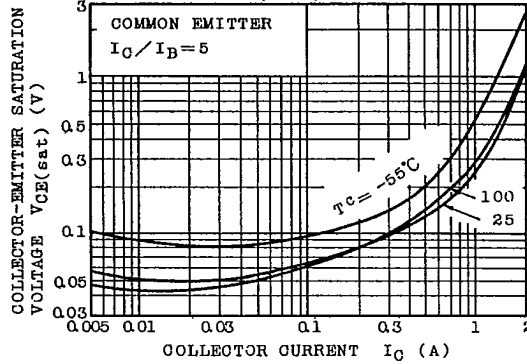

V_{BE(sat)} - I_C



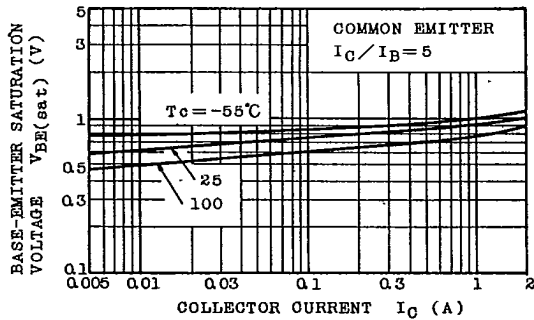


I_C - V_{BE}

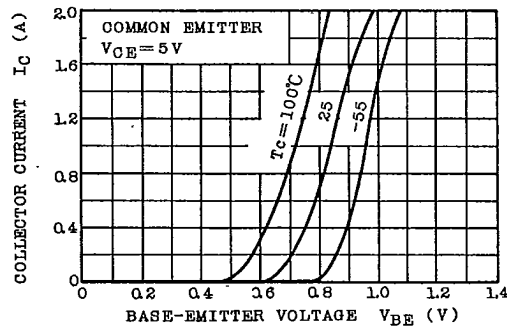

TOSHIBA CORPORATION

2SC3309

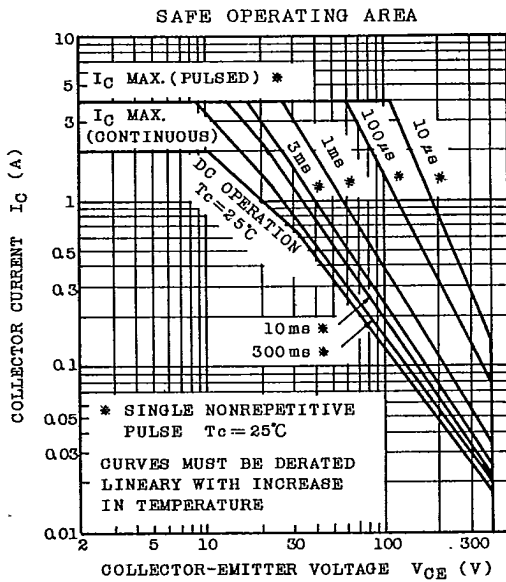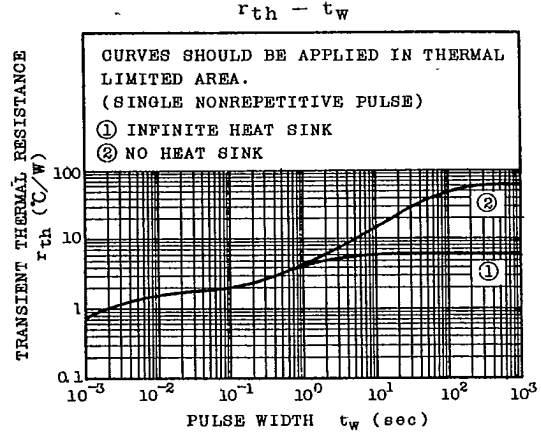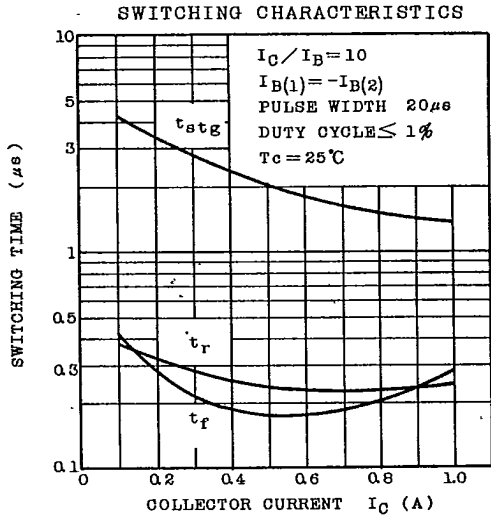

TOSHIBA CORPORATION

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.