


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 12/15/09'		


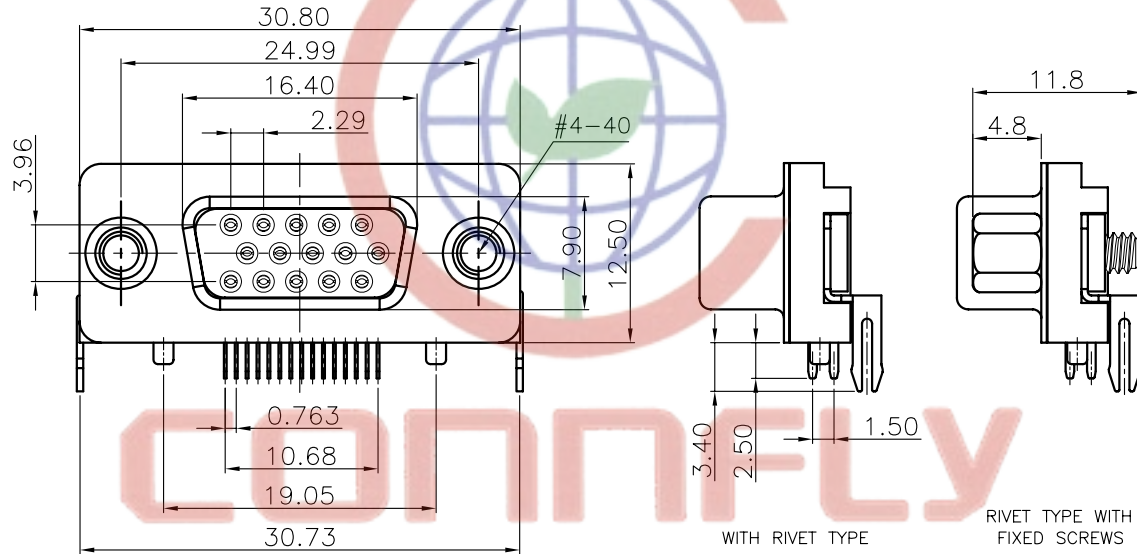


NOTES:

- PRODUCTS PERFORMANCE:
 - VOLTAGE RATING: 250V AC.
 - CONTACT CURRENT RATING: 1.5A MAX. PER PIN.
 - CONTACT RESISTANCE: 20mΩ MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ MIN.
 - TEMPERATURE RANGE: -45°C~+105°C.
- PRODUCT NUMBER CODE:

DS1038-*03 - X X X X X X

- SCREW TYPE
- B: WITH RIVET TYPE
- C: RIVET TYPE WITH FIXED SCREWS
- D: RIVET TYPE WITH SCREWS IN BULK PACKAGE
- CONTACT PLATING
- Si: SELECTIVE GOLD FLASH
- 8: FULL GOLD FLASH
- SHELL PLATING
- N: Nickel
- T: Tin
- COLOR OF HOUSING
- B: BLACK
- W: WHITE
- L: BLUE
- CONNECTOR TYPE
- F: FEMALE
- No. OF CONTACTS
- 15: 15pos.

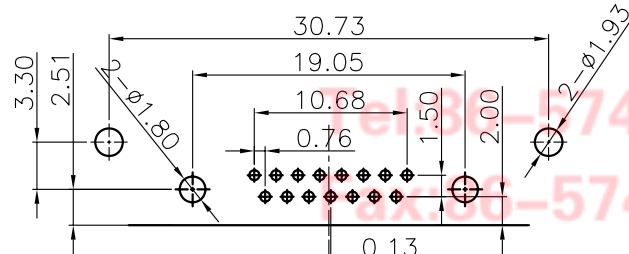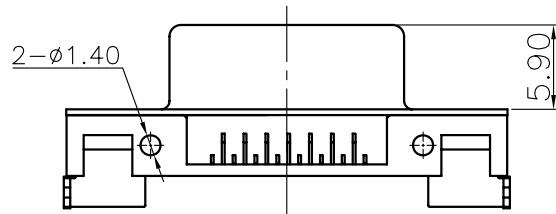

RECOMMEND PCB LAYOUT
(TOLERANCE ±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		D-SUB H.D RIGHT ANGLE SLIM TYPE
.X	±0.38	.X	±3°	mm	
.XX	±0.25	.XX	±2°		
DRAWING TYPE		CUSTOMER		SHEET SIZE	SERIES
SCALE		1:1	SHEET	A4	DS1038-03 SERIES
DRAWING NO.		C-DS1038-03-XXXXXX			



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD

TEL: 86-574-63508787
 FAX: 86-574-63510817
 E-mail: sale@zhenqin.com.cn
 Http://www.connfly.com