


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/09/05'		

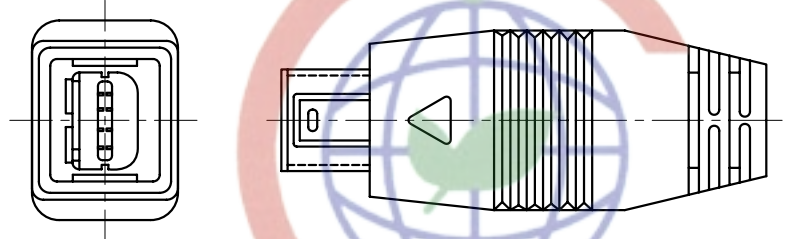

NOTES:

- SPECIFICATIONS
 - .CURRENT RATING: 0.5A/pin Max.
 - .VOLTAGE RATING: 30V(DC)
 - .DIELECTRIC WITHSTANDING VOLTAGE: 100VAC 1 minute.
 - .CONTACT RESISTANCE: 50mΩ Max.
 - .INSULATION RESISTANCE: 100MΩ Min
 - .TEMPERATURE RANGE: -20°C-+70°C




2.MATERIALS

- .HOUSING: PBT.
- .HOOD: ABS.
- .SHELL: STEEL
- .CONTACT: COPPER ALLOY

3.PRODUCT NUMBER CODE:

DS1105 - X X X X

- Contact plating
- 0: Selective gold flash
- C: Selective 3u" gold
- Shell plating
- 6: Tin
- N: Nickel
- 8: Full gold
- Color of Hood
- B: BLACK
- Color of housing
- B: BLACK

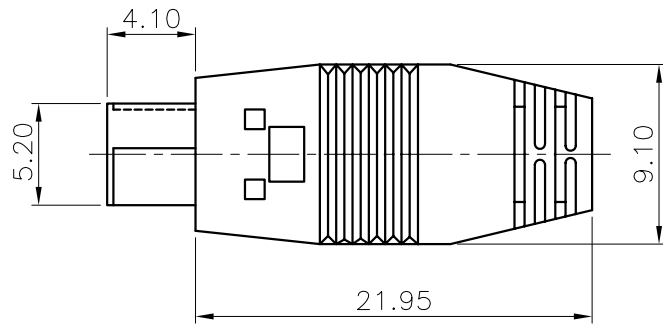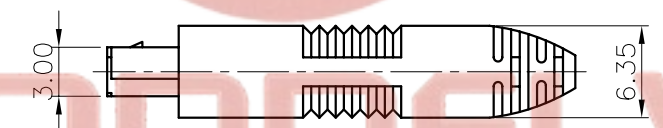

Tel: 86-574-63508787
 Fax: 86-574-63510817

Products series
 DS1105

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	MINI USB 4PIN A TYPE MALE SOLDER	
X.	±0.60	X.	±5'	UNITS	mm	SHEET SIZE	A4	SERIES DS1105
.X	±0.38	.X	±3'	晨翔电子有限公司 CONNFLY ELECTRONIC CO. LTD				
.XX	±0.25	.XX	±2'					
DRAWING TYPE		CUSTOMER		West Town Cixi Ningbo China P.O.:315321				
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	C-DS1105-XXX							